

## **Assembly Instructions**



(WxDxH) 1.60m x 1.525m x 0.75m Product Name: Katrina Picnic Table

Pressure Treated products should not be treated with any other products for the first month.

## PLEASE KEEP THESE INSTRUCTIONS

Zest4Leisure 01352 752555 option 1 – sales@zest4leisure.co.uk


## **Katrina Picnic Table Assembly Instructions**

Requires 2 person assembly.


Tools required: Corded / Cordless Drill (Advisable), Pozi-drive Bit / Screwdriver, Hammer / Mallet, 13mm Spanner / Adjustable Spanner.

| Katrina Picnic Table Pack List |                    |          |  |
|--------------------------------|--------------------|----------|--|
| Item                           | Description        | Quantity |  |
| А                              | Legs               | 4        |  |
| В                              | Table Top          | 1        |  |
| С                              | Bench Support Rail | 4        |  |
| D                              | Diagonal Bracing   | 2        |  |
| E                              | Bench Assembly     | 2        |  |


| Fixings |                              |    |
|---------|------------------------------|----|
|         | 50mm Screws                  | 4  |
|         | 70mm Screws                  | 12 |
|         | 140mm Bolts / Nuts / Washers | 16 |

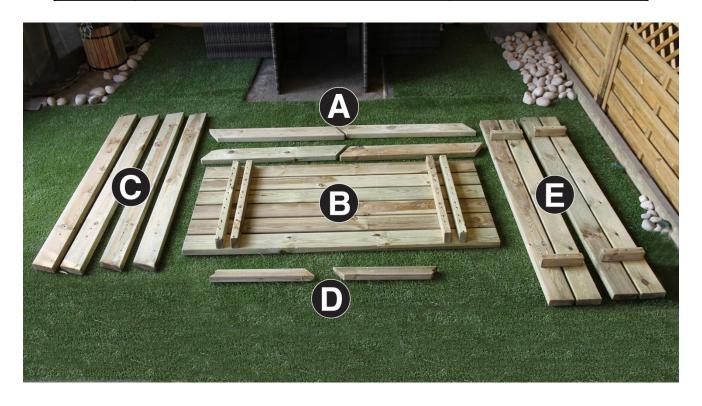

| riease take a few moments to check all pack contents listed.   |  |  |  |
|--|--|--|--|
| Assembly requires 2 persons.   |  |  |  |
| Tools required: Corded / Cordless Drill, Pozi-drive Bit / Screwdriver, Hammer / Mallet, 13mm Spanner / Adjustable Spanner. |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
| 1.   | Locate Leg (A) between rails on underside of Table-Top (B), align bolt holes and insert 2no 140mm bolts per Leg. See Fig 1. Repeat procedure for remaining Legs. Do not fully tighten at this stage.   |  |  |
|  |  |  |  |
| 2.   | Please note that each of Bench Support Rails (C), have 1 pre drilled screw hole at 1 end, and 2 pre drilled screw holes at the other end, which are located approx 30mm down from top edge of the Support Rail. Ensure that both pairs of Bench Support Rails are orientated to allow for a total of 3no holes per end / per pair.   |  |  |
|  | Partially insert 4no 140mm bolts into predrilled bolt holes in Bench Support Rail (C), position as shown in Fig 2a, align with bolt holes in Legs and tap bolts through. Position the second (of the pair) Bench Support Rail onto bolt ends and tap into position. See Fig 2b. Repeat procedure for the remaining Legs. Attach nuts and washers but do not fully tighten at this stage. |  |  |
|  |  |  |  |
| 3.   | Position Diagonal Bracing (D) as shown in Fig 3a & 3b. Attach using 2no 50mm screws. Repeat procedure for opposite Diagonal Bracing.   |  |  |
|  |  |  |  |
| 4.   | Turn table over and position Bench Assembly (E) onto Bench Support Rails as shown in Fig 4a. Secure in position using 12no 70mm screws (6no screws per Bench). See Figs 4b,4c & 4d. Repeat procedure for remaining Bench Assembly.   |  |  |
|  |  |  |  |
| 5.   | Fully tighten <b>ALL</b> nuts at this stage.   |  |  |
|  |  |  |  |

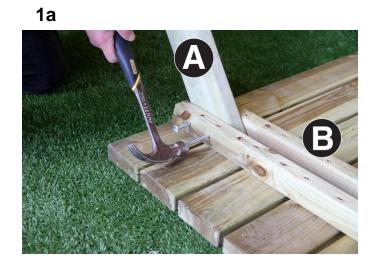



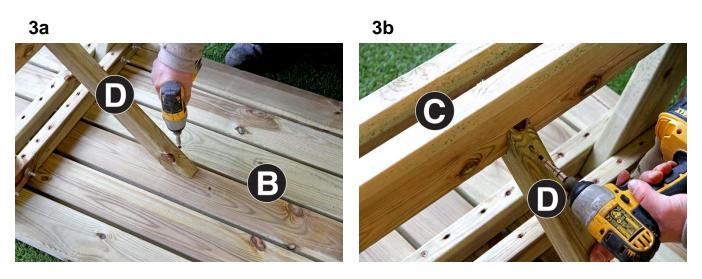

4a



4b



4c



4d

