



Assembly Instructions



(W x D x H) 1.75m x 0.92m x 0.92m
Product Name: Lily Double Relax Seat

Pressure Treated products should not be treated with any other products for the first month.

PLEASE KEEP THESE INSTRUCTIONS

Zest4Leisure
01352 752555 option 1 – sales@zest4leisure.co.uk


Lily Double Relax Seat Assembly Instructions

Requires 2 person assembly.

Tools required: Corded / Cordless Drill, Pozi-drive Bit / Screwdriver, 3mm Drill Bit required in order for you to drill all screw holes before construction.

Lily Double Relax Seat Pack List		
Item	Description	Quantity
A	Back Support Assembly	1
B	Seat Assembly	1
C	Back Assembly	1
D1/D2	Armrest/Leg Assembly	2
E	Leg	2
F	Upper Shelf Assembly	1
G	Lower Shelf Assembly	1

Fixings		
	50mm Screws	18
	Hex Bolts	12
	'T' Nuts	12
	Hex Screws	4

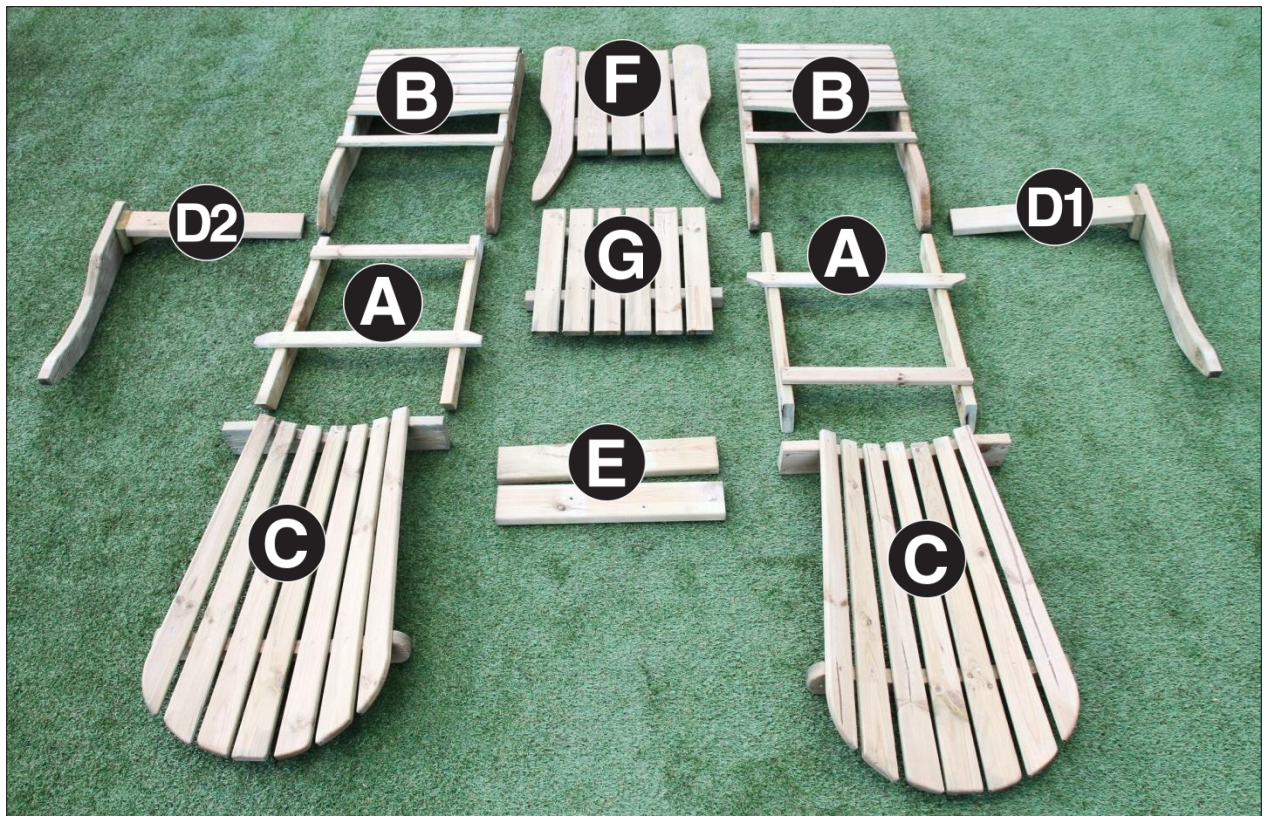

Please take a few moments to check all pack contents listed.

Assembly requires 2 persons.

Tools required: Corded/Cordless Drill, Pozi-drive Bit/Screwdriver, 3mm Drill Bit required in order for you to drill all screw holes before construction.

1. Insert Back Assembly A between rear legs of Seat Assembly B, align bolt holes and insert 2no Hex Bolts and 'T' Nuts. See Figs. 1a, 1b & 1c.
Do not fully tighten at this stage.
2. Locate Back Assembly C as shown in Fig 2a and fix in position using 6no Screws. See Figs 2b & 2c.
3. Position Armrest/Leg Assembly D1 as shown in Fig.3a. Align bolt holes and insert 2no Hex Bolts and 'T' Nuts. See Fig. 3b. Do not fully tighten.

Attach Armrest/Leg Assembly D1 to Back Support Assembly A using 1no Screw. See Fig.3c.

Repeat stages 1-3 for remaining seat using Armrest/Leg Assembly D2.

4. Position Leg E as shown in Fig.4a and attach to Upper Shelf Assembly F using 1no. Screw. Fix remaining Leg E in corresponding position on Upper Shelf Assembly.

Ensuring correct orientation of Lower Shelf Assembly G, attach to both Legs E using 2no. Hex Screws. See Fig.4b.

5. Place shelf assembly between seat assemblies (D1 & D2 outermost) Fig.5a, locate screw/bolt holes and attach using 4no. Hex Bolts & 'T' Nuts to front (Fig.5b) and 2no Hex Screws to rear (Fig.5c).

Attach rear of Upper Shelf Assembly F to Back Support Assemblies A using 2no Screws as shown in Fig.5d.


Fully tighten all bolts at this stage.

Lily Double Relax Seat is now complete.

1a




1b

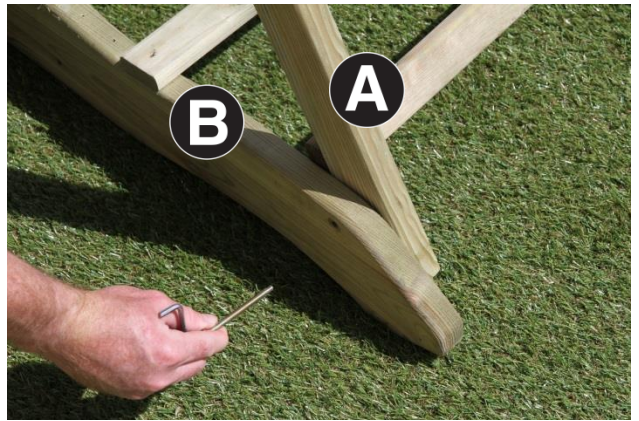


1c



2a

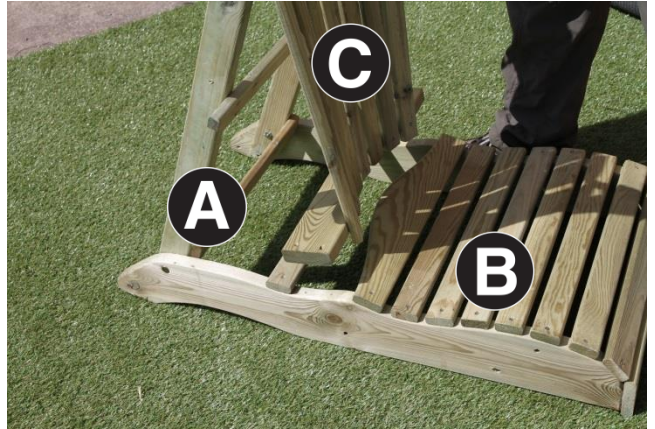


2b

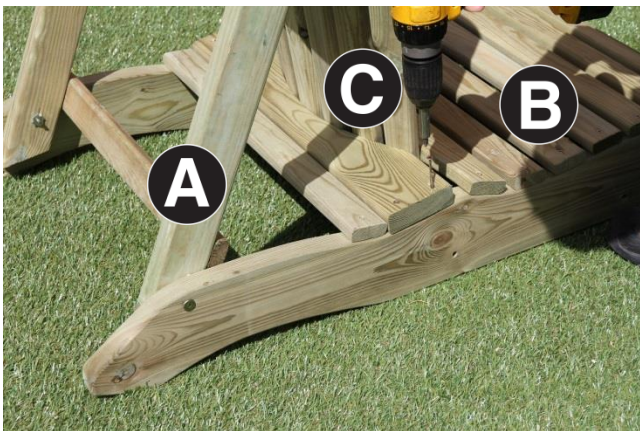


2c




3a

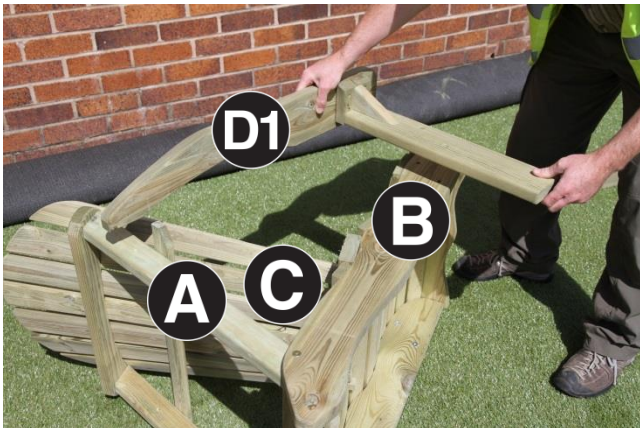

3b

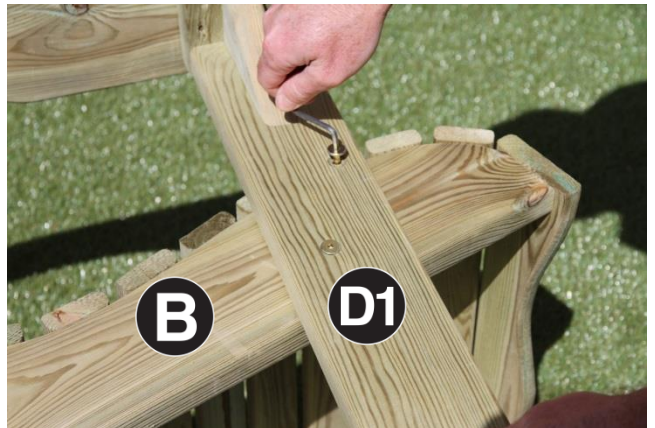


3c

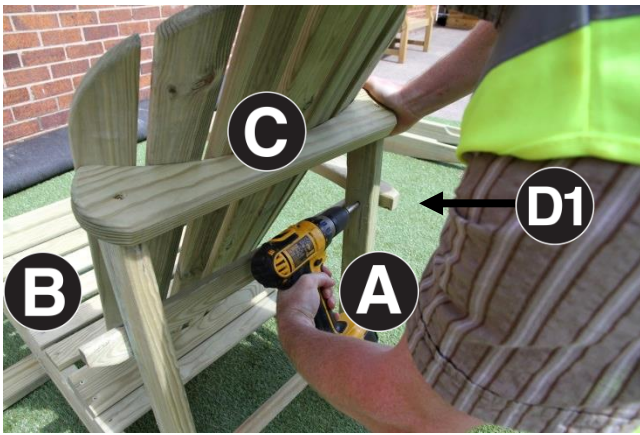

4b



5b

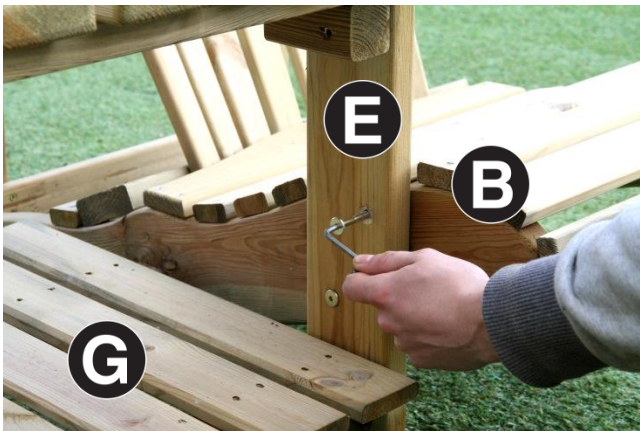


5d



4a



5a

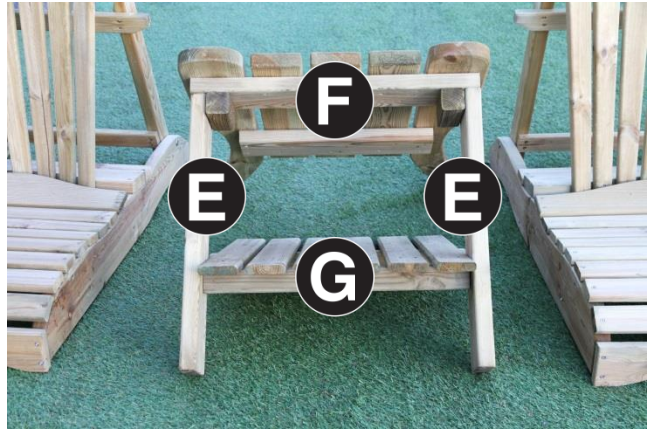

5c

