

Assembly Instructions



(W x D x H) 0.57m x 0.57m x .0.87m

Product Name: Lisa Chair

(Part of Set)

Pressure Treated products should not be treated with any other products for the first month.

PLEASE KEEP THESE INSTRUCTIONS

Zest4Leisure

01352 752555 option 1 – sales@zest4leisure.co.uk


Lisa Chair Assembly Instructions

Requires 2 person assembly.

Tools required: 4mm Hex Key, Corded / Cordless Drill & Pozi-drive Bit / Screwdriver, 3mm Drill Bit required in order for you to drill all screw holes before construction.

Lisa Chair Pack List		
Item	Description	Quantity
A	Seat Assembly	1
B	Back Assembly	1
C	RH Armrest Assembly	1
D	LH Armrest Assembly	1
	Diagonal Bracings	4

Fixings		
	Hex Bolts	8
	'T' Nuts	8
	40mm Screws	8

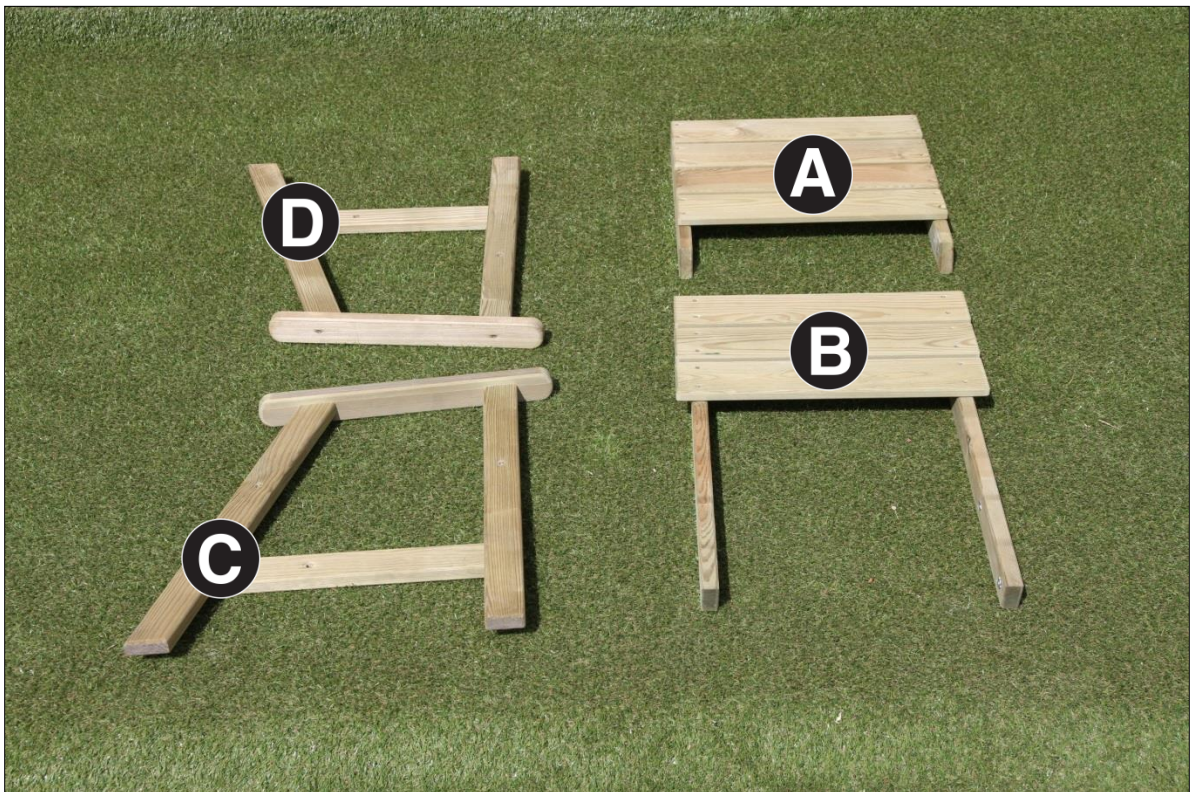

Please take a few moments to check all pack contents listed.

Assembly requires 2 persons. Tools required: 4mm Hex Key, Corded / Cordless Drill & Pozi-drive Bit / Screwdriver, 3mm Drill Bit required in order for you to drill all screw holes before construction.

1. Position Seat Assembly A and Back Assembly B as shown in Fig.1a ensuring that bolt holes are correctly aligned and attach using 2no Hex Bolts and 'T' Nuts. Ensure correct orientation of Hex Bolt and 'T' Nut (Figs.1c & 1d).

Do not fully tighten at this stage.

2. Place RH Armrest C onto Back/Seat Assembly (Fig.2a), ensure all bolt holes are aligned and attach using 3no Hex Bolts and 'T' Nuts (Figs.2b, 2c & 2d).


Repeat procedure for LH Armrest D.

Fully tighten all bolts at this stage.

Invert chair assembly and place on flat surface. Position 2no Diagonal Bracings to seat and right hand Armrest Assembly C and attach using 4no 40mm screws (2 per bracing) as shown in Fig.3a

Repeat procedure for remaining 2no Diagonal Bracings on left hand side of chair (Fig.3b)

1a

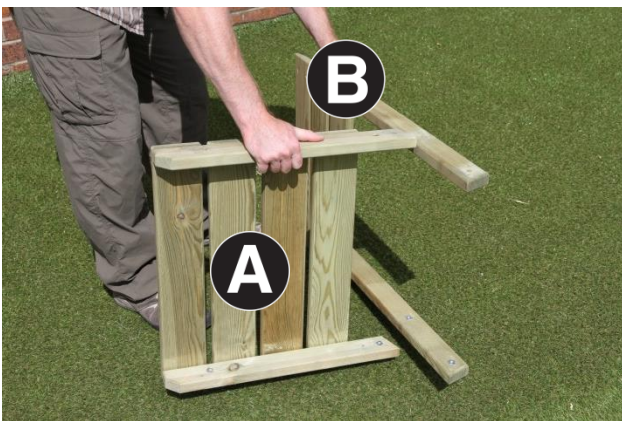

1b




1c




1d




2a

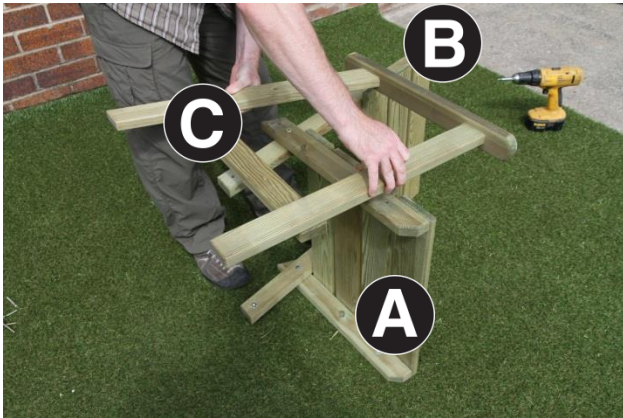


2b

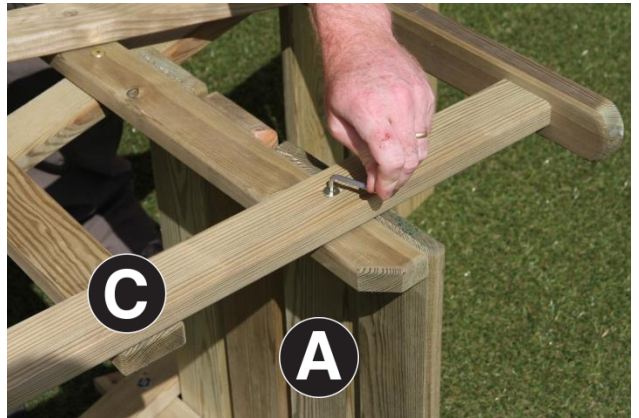


2c

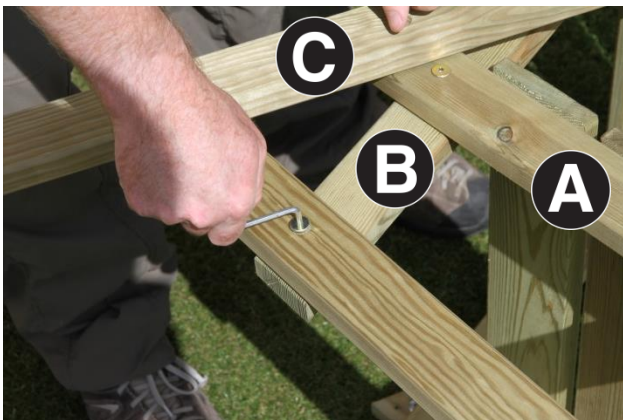


2d

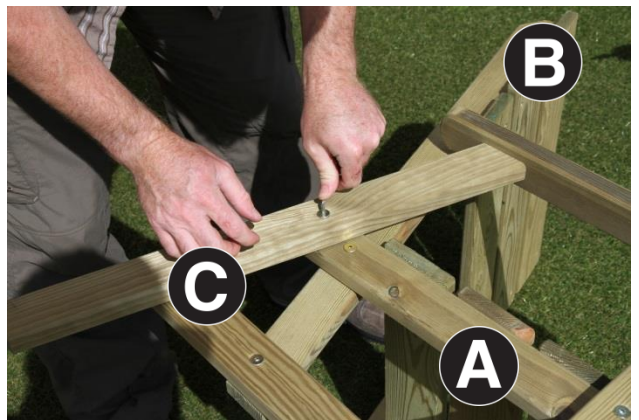

3a

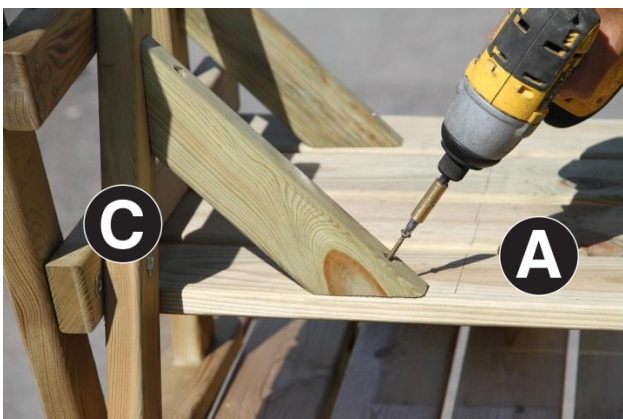

3b

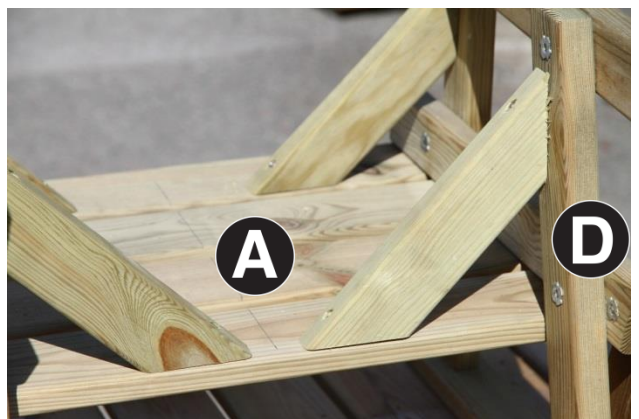

Lisa Chair is now complete.