

## Assembly Instructions



2.2m (Diam) x 0.77m (H)

Product Name: Rose Round Picnic Table

Pressure Treated products should not be treated with any other products for the first month.

**PLEASE KEEP THESE INSTRUCTIONS**

Zest4Leisure

01352 752555 option 1 – sales@zest4leisure.co.uk


# Rose Round Picnic Table Assembly Instructions

Requires 2 person assembly.

Tools required: Corded / Cordless Drill, Pozi-drive Bit / Screwdriver, 17mm Socket & Ratchet, 3mm Drill Bit required in order for you to drill all screw holes before construction.

Rose Round Picnic Table Pack List		
Item	Description	Quantity
A1 & A2	Seat Bar	4
B	Seat Assembly	4
C	Leg	8
D	Leg Brace	4
E	Table-Top Support	4
F	Table-Top	1

Fixings		
	70mm Screws	16
	90mm Bolt, 30mm Washer, Spring Washer & Nut	16
	130mm Bolt, 30mm Washer, Spring Washer & Nut	4
	130mm Bolt, 20mm Washer & Nut	12
	Plastic Nut Cover	12

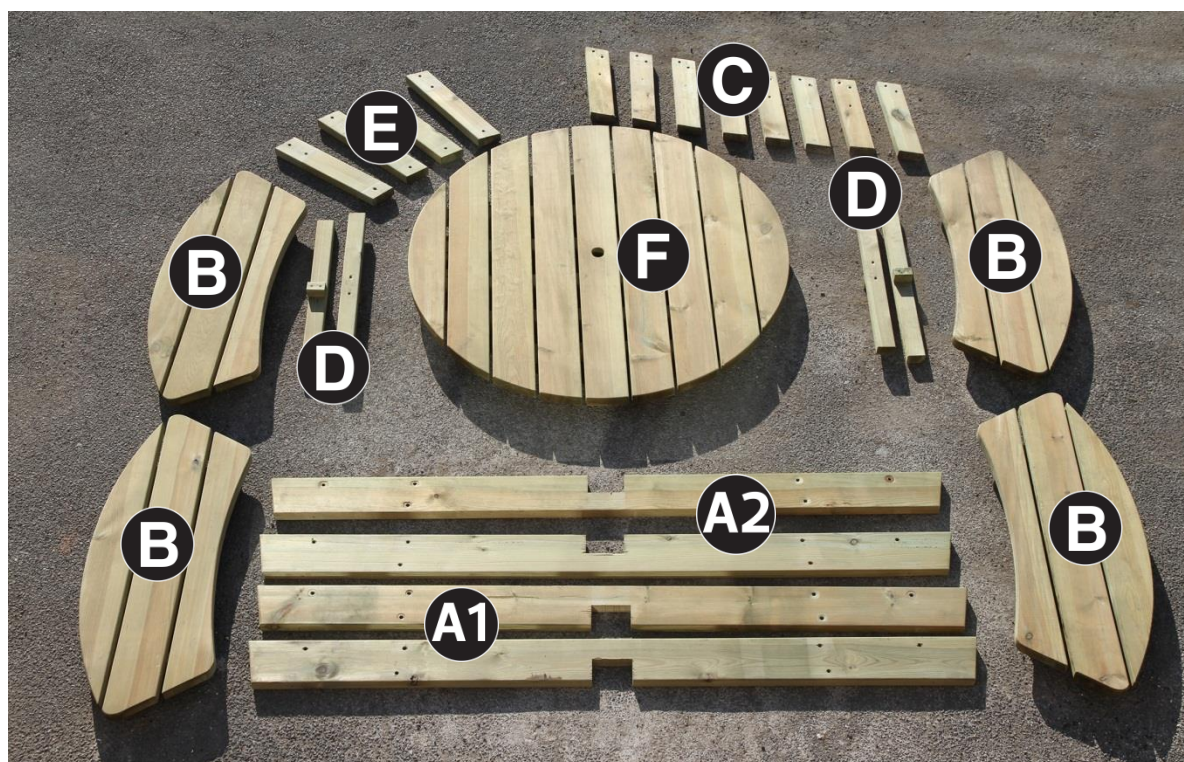

**Please take a few moments to check all pack contents listed.**

**Assembly requires 2 persons.**


**Tools required: Hammer, Corded / Cordless Drill, Pozi-drive Bit / Screwdriver, Adjustable Spanner, 17mm Socket & Ratchet, 3mm Drill Bit required in order for you to drill all screw holes before construction.**

1. Position Seat Bars (A1) onto 2no. Seat Assemblies (B) as shown in Fig 1a, align bolt holes and insert 130mm bolts (Fig 1b). Attach 30mm washers, spring washers and nuts. Do not fully tighten at this stage. Repeat process using Seat Bars A2 and remaining Seat Assemblies.
2. Position Leg (C) as shown in Fig 2a, align bolt holes and insert 2no 90 mm bolts & attach 30mm washers, spring washers and nuts (Fig 2b). Do not fully tighten at this stage. Repeat process for the remaining 7 legs.
3. Position Leg Brace (D) on to Seat Bars (as shown in fig 3a), and fix in position using 2no 70mm screws. Attach Legs to Leg Brace with 2no 70mm screws. See Fig 3b. Repeat for remaining Leg Braces.
4. Turn Assemblies over and interlock Seat Bars A1 and A2 as shown in Fig 4a & 4b.
5. Insert Table-Top Support (E), align bolt holes and insert 2no 130mm bolts (Fig 5a & 5b). Attach Nut Cover Base (Fig 5c), 20mm washers and nuts. Do not fully tighten at this stage. Repeat for remaining 3no Table-Top Supports.
6. Carefully locate Table-Top (F) on to Table-Top Supports, align bolt holes and insert 4no 130mm bolts (Fig 6a & 6b). Attach Nut Cover Base, 20mm washers and nuts as previously.
7. **ALL** nuts to be fully tightened at this stage and caps to be fitted to Nut Cover Bases.


**Rose Round Picnic Table is now complete.**



1a

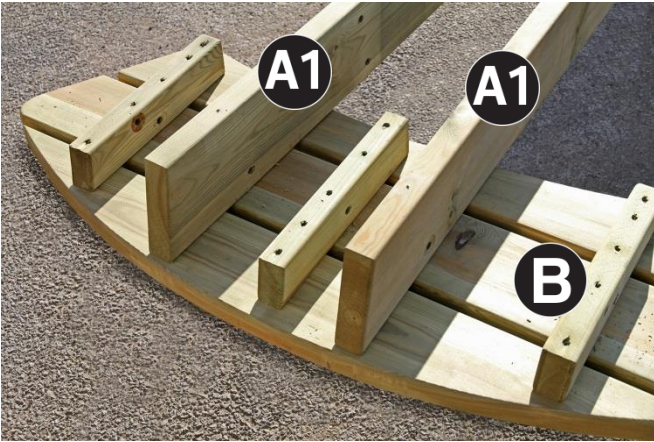


1b

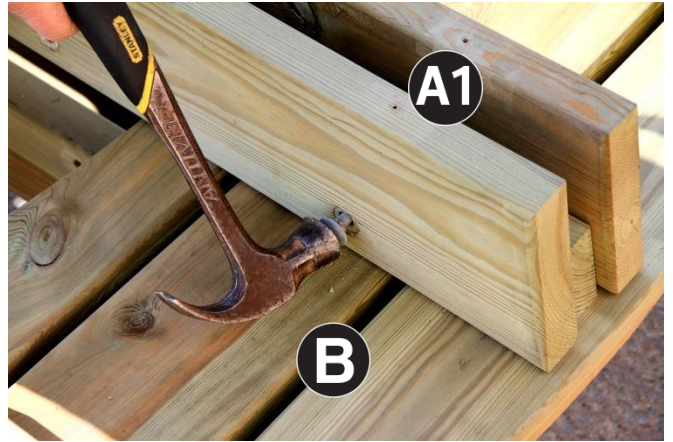

2a



2b

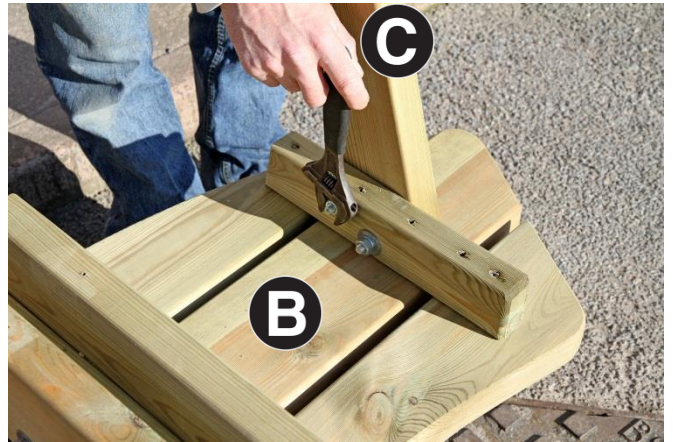

3a




3b







4a

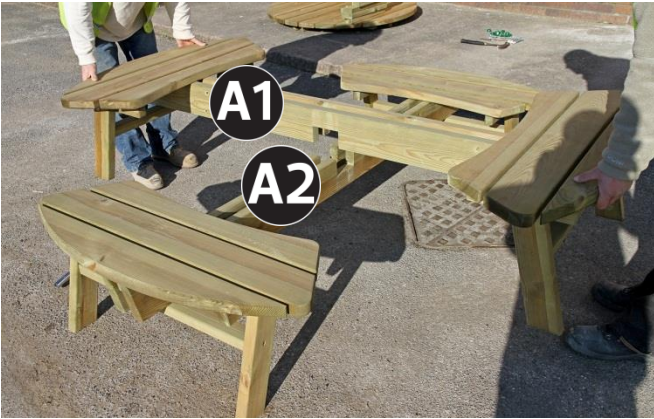


4b

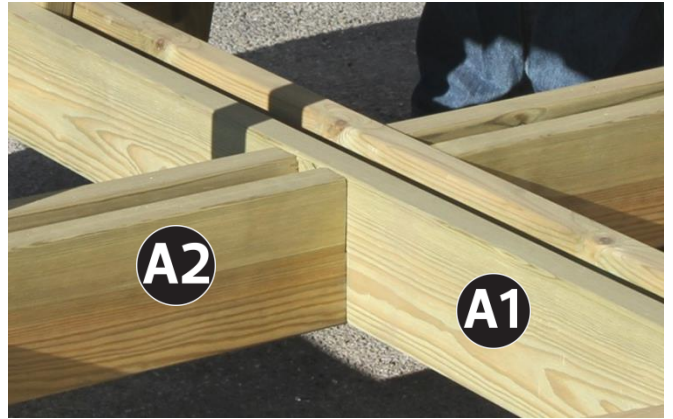


5a

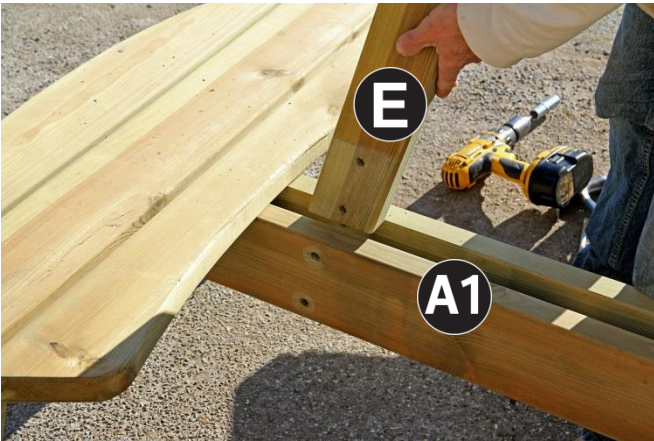

5b

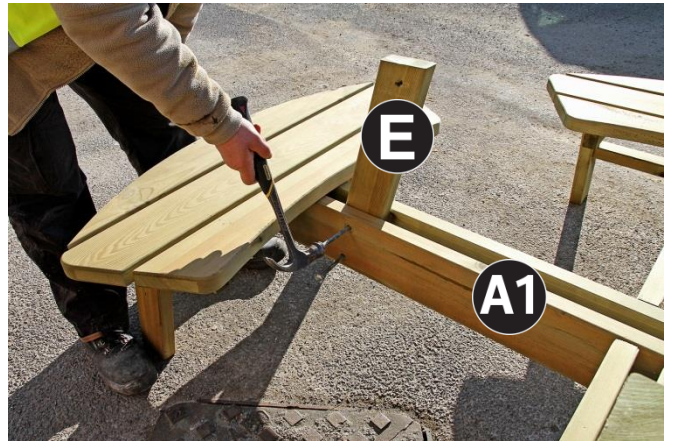

5c

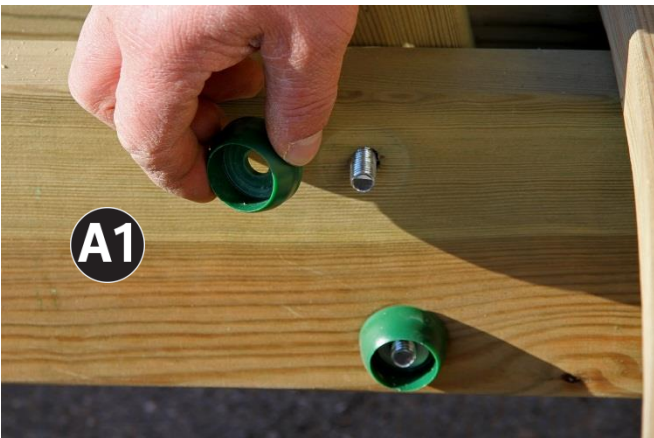

5d



6a



6b

