

## **Assembly Instructions**



(W x D x H) 2.10m x 0.80m x 2.13m Product Name: Twilight Arch

Pressure Treated products should not be treated with any other products for the first month.

## PLEASE KEEP THESE INSTRUCTIONS

Zest4Leisure 01352 752555 option 1 – sales@zest4leisure.co.uk


## **Twilight Arch Assembly Instructions**

Requires 2 person assembly.

Tools required: Corded / Cordless Drill, Pozi-drive Bit / Screwdriver,, Tape Measure. 3mm Drill Bit required in order for you to drill all screw holes before construction.

Twilight Arch Pack List			
Item	Description	Quantity	
А	Rail	2	
В	Rafter	5	
С	Post	4	
D	Trellis Panel	2	
E	Bracing	4	

Fixings		
	60mm Screws	26
	40mm Screws	8

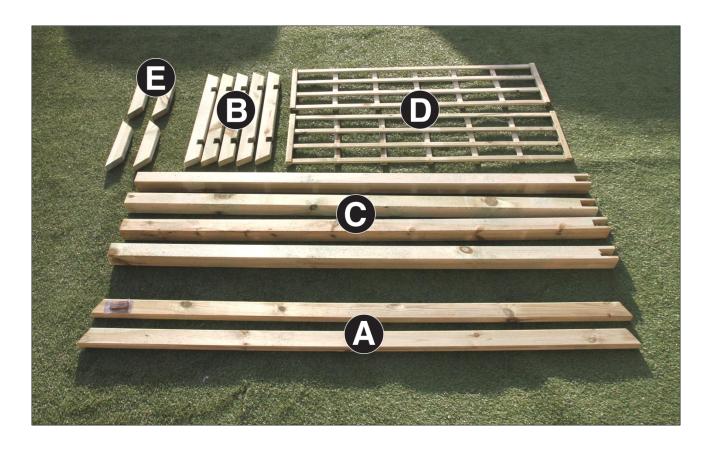


## Please take a few moments to check all pack contents listed. Assembly requires 2 persons.


Tools required: Corded/Cordless Drill, Pozi-drive Bit/Screwdriver,, Tape Measure, 3mm Drill Bit required in order for you to drill all screw holes before construction.

1.	Position Rafters B at both ends of Arches A and fix using 4no 60mm Screws - 2
	per Rafter (Fig.1a). Space out remaining Rafters B equally (Fig.1b) and attach
	using 6no 60mm Screws.


- 2. Locate Post C onto Arch A as shown in Fig.2a (adjust width to suit). Fix in position using 2no 60mm Screws (Fig.2b).
- 3. Place Trellis Panel D 400mm from base of Post C and fix in position using 2no 40mm Screws (Figs.3a & 3b).
- 4. Position second Post C as shown in Fig.4a and fix to Arch A using 2no 60mm Screws.
  - Fix Trellis Panel D to second Post C using 2no 40mm Screws (Figs.4b & 4c).
  - Repeat stages 1-4 for remaining Posts & Trellis Panel on opposite side of arch.
- 5. Ensuring Post C is perpendicular to Rail A, place Bracing E as shown in Fig.5 and fix in position using 2no 60mm Screws.
  - Repeat procedure for remaining bracings.

1a 1b






2a 2b






3a 3b












4c



5

