

Assembly Instructions



(WxDxH) 1.0m x 0.7m x 0.8m
Product Name: Deep Root Planter 1m

Pressure Treated products should not be treated with any other products for the first month.

PLEASE KEEP THESE INSTRUCTIONS

Zest4Leisure
01352 752555 option 1 – sales@zest4leisure.co.uk


Deep Root Planter 1m Assembly Instructions

Requires 2 person assembly.

Tools required: Corded/Cordless Drill, Pozidrive Bit/Screwdriver, 3mm Drill Bit required in order for you to drill all screw holes before construction.

Deep Root Planter 1m Pack List		
Item	Description	Quantity
A	End Panel	2
B	Side Panel	2
C	Base Board Support Rail	2
D	Baseboard	9
E	Capping Trim	4

Fixings		
	45mm Screws	30
	35mm Screws	8

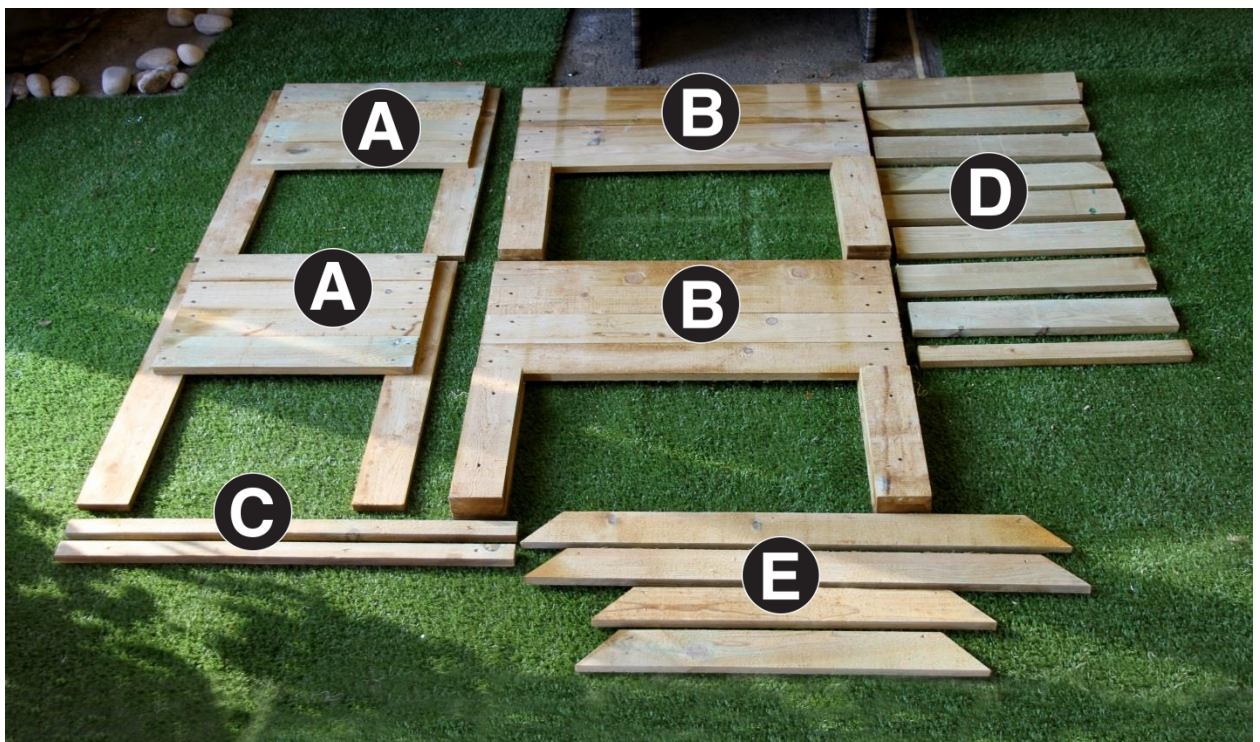

Please take a few moments to check all pack contents listed on page 1 of the Assembly Instructions.


Assembly requires 2 persons.

Tools required: Corded/Cordless Drill, Pozidrive Bit/Screwdriver, 3mm Drill Bit required in order for you to drill all screw holes before construction.


- 1.** Attach one End Panel (A) to Side Panels (B) using 6no 45mm screws per End Panel, as shown in Figs 1a & 1b. Repeat process with the second End Panel (A) as shown in Fig 1c. Position screws as shown in Fig 1d.
- 2.** Attach Base Board Support Rails (C) to base of Side Panels using 8no 35mm screws (4no per side) as shown in Figs 2a & 2b.
- 3.** Loose fit ALL base boards (D) as shown in Figs 3a & 3b. A minimum of three central boards to be screwed down to Base Board Support Rails using 6no 45mm screws.
- 4.** Set out the 4no Capping Trims (E) on top of the planter and attach using the 12no 45mm screws (3no screws per trim) as shown in Figs 4a & 4b.

The Deep Root Planter 1m is now complete.


1a

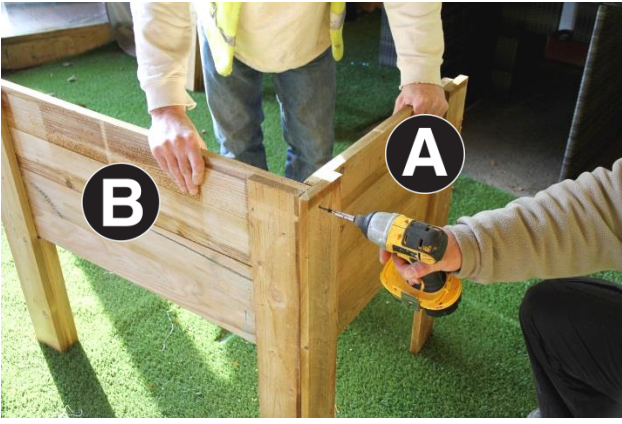


1b

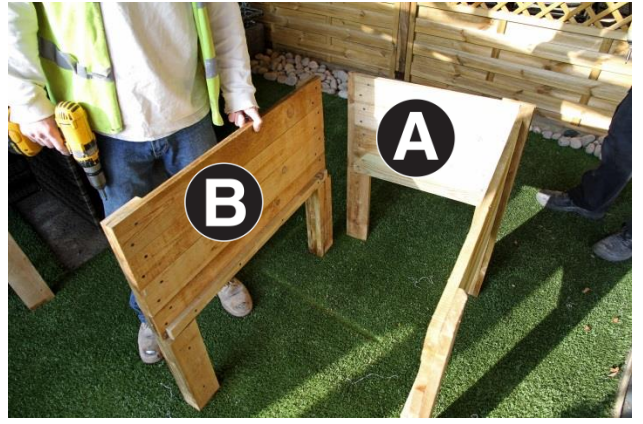


1c

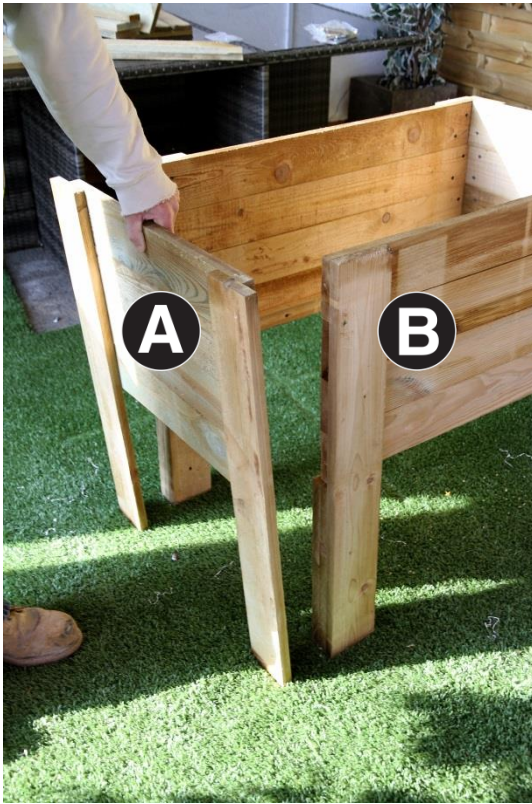

1d

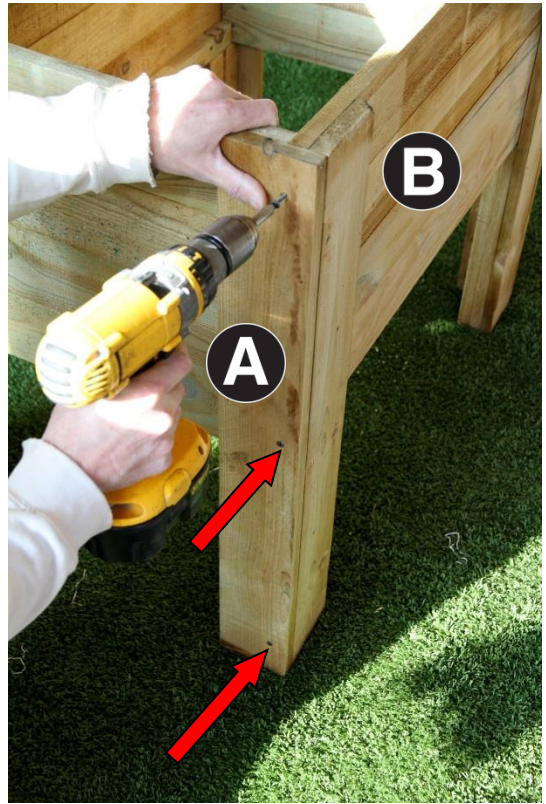


2a

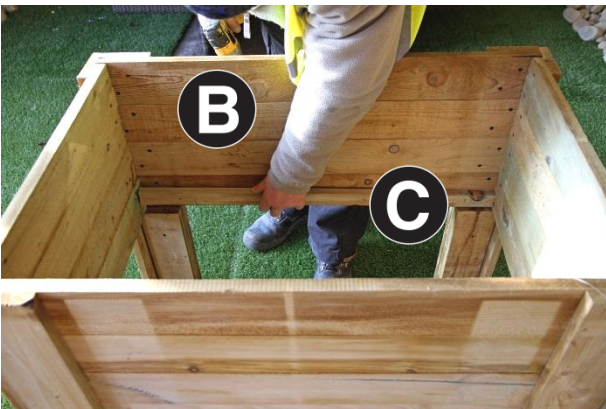


2b



3a

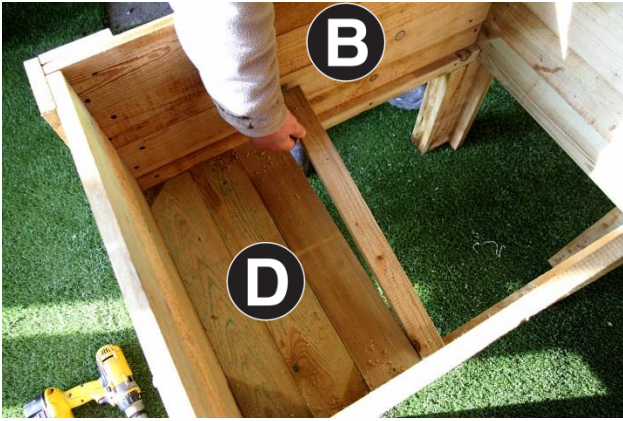

3b

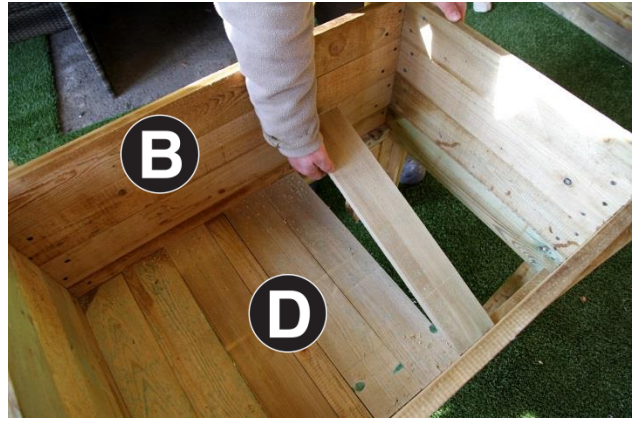

4a



4b

